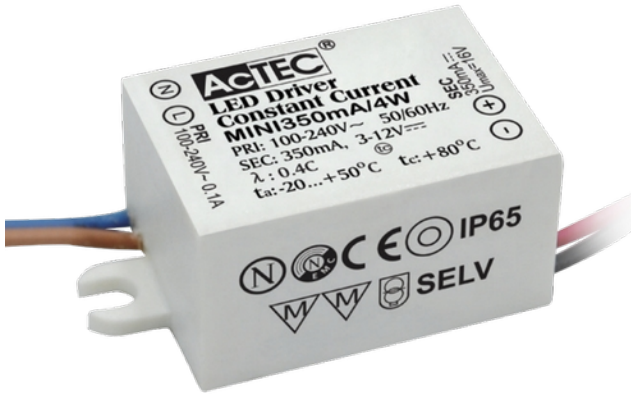


**PRODUCT DATA SHEET**

Driver 350mA cc 4W (6-12V) Phasecut Mini AcTec

Art.no: MINID35004NT

*Lighting Solutions*

Driver 350mA cc 4W (6-12V) Phasecut Mini AcTec



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP65
Outdoor	No

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Max Output Voltage (V)	12
Dimming (driver)	Phase-Cut

**PRODUCT DATA SHEET**

Driver 350mA cc 4W (6-12V) Phasecut Mini AcTec

Art.no: MINID35004NT

*Lighting Solutions*

DRIVER	
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
IP (driver)	IP65
Expected Lifetime (driver) (h)	30000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	6.0 - 12.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	50.0
Max load pr circuit - B10	35
Max load pr circuit - B16	56
Max load pr circuit - C10	74
Max load pr circuit - C16	118
Inrush current time (μ s)	300.0
Inrush current I _{max} (A)	5.0

DIMENSIONS	
Length (product) (mm)	53.0
Width (product) (mm)	27.0
Height (product) (mm)	21.0
Weight (product) (kg)	0.04

MATERIALS AND SURFACES	
Color	White

ENERGY AND CERTIFICATIONS	
CE mark	Yes