




FDV SPEC SHEET

T-Line

Art. no: 5040-90-2

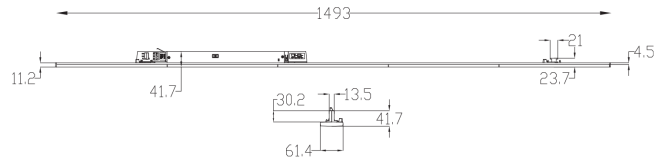

T-Line



Art. no: 5040-90-2

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 7975 |
| Lumen LED (tc=25): | 8200 |
| Beam Angle: | 90 |
| CCT (Color Temperature): | 4000 |
| CRI / Ra: | 80 |
| Color Code: | 840 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Lens |

MOUNTING / CONNECTION

| | |
|-------------|-----------------|
| Connection: | Track 3-Circuit |
| Mounting: | Track |

ELECTRICAL DATA

| | |
|--------------------------------------|-----------|
| Dimming: | None |
| System Power [W]: | 35-50 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 24 |
| Max load pr circuit - B16: | 30 |
| Max load pr circuit - C10: | 24 |
| Max load pr circuit - C16: | 38 |
| Leakage current [mA]: | 0,25 |
| Inrush current I _{max} [A]: | 20 |
| Inrush current time [µs]: | 136 |



FDV SPEC SHEET

T-Line

Art. no: 5040-90-2



Lighting Solutions

PRODUCT

| | |
|-----------------------------|-----------------|
| Ingress Protection: | IP20 |
| Operating Temperature [°C]: | -25 - 60 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Black |
| RAL: | RAL9017 |
| Length [mm]: | 1493 |
| Height [mm]: | 11 |
| Width [mm]: | 61,4 |
| Weight [kg]: | 1,32 |