



PRODUCT SHEET


Cold 10 Mini

Art. no: 1111-50-2

NORLUX®


Lighting Solutions

Cold 10 Mini

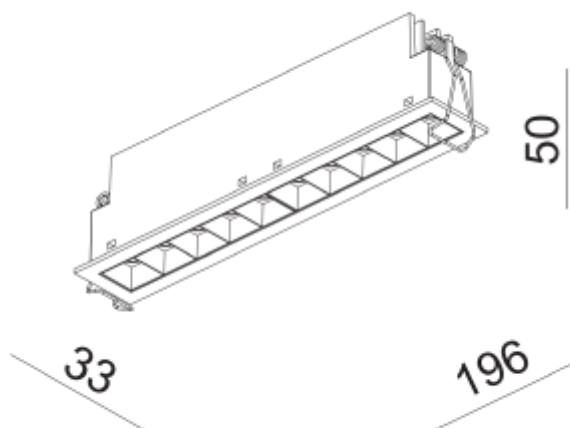

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	21W
CCT (Color Temperature):	3000K
CRI / Ra:	90
Lumen Output:	1170lm
Lumen LED (tc=25):	2000lm
Beam Angle:	50°
Lens (Diffuser):	N/A
Dimming:	Phase-Cut
Flickerfree:	No
System Voltage [V]:	230V 50Hz
Connection:	EPN0024
Mounting:	Recessed, Ceiling
Cut-out [mm]:	189*27mm
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	58lm/W
UGR (<=):	9
Color:	Black
Length [mm]:	196mm
Height [mm]:	50mm
Width [mm]:	33mm
Weight [kg]:	0,54kg

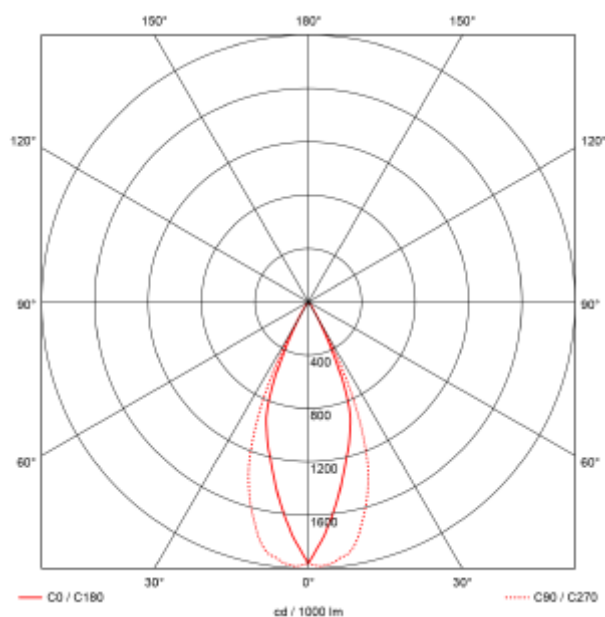

Cold 10 Mini is an elegant recessed downlight, perfect for a variety of applications, including cafes, cabins, general rooms, hotels, homes, and shops. With a cut-out size of 189x27mm and phase-cut dimming, this downlight offers exceptional flexibility. With an IP20 rating and protection class 2, as well as a lifespan of L80B10: 100,000 hours, Cold 10 Mini ensures long-lasting and reliable performance. Its black RAL9003 finish and slim design make it a stylish addition to any interior.