




FDV SPEC SHEET

Gemma Up&Down 500lm 830 45° 2x6W Dark Grey
Art. no: 2390-45-7

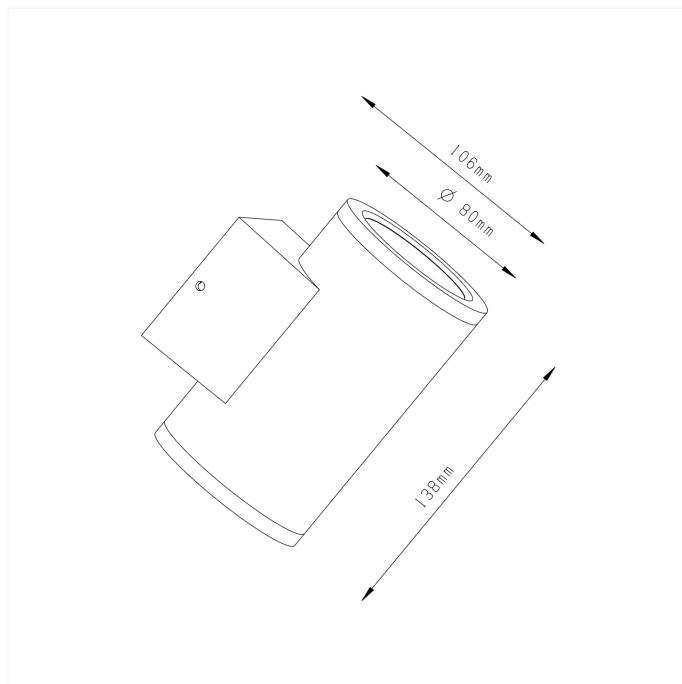

Gemma Up&Down 500lm 830 45° 2x6W Dark Grey



Art. no: 2390-45-7

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	406
Lumen LED (tc=25):	500
Beam Angle:	45°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
Lens (Diffuser):	Clear

MOUNTING / CONNECTION

Connection:	Terminal
Mounting:	Wall, Surface

ELECTRICAL DATA

Dimming:	None
System Power [W]:	2x6
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	17
Max load pr circuit - B16:	26
Max load pr circuit - C10:	29
Max load pr circuit - C16:	47
Inrush current I _{max} [A]:	15
Inrush current time [μs]:	125
Socket / Cap-Base:	N/A
Current Output [mA]:	500
Voltage Forward Min [V]:	18
Voltage Forward Max [V]:	24



FDV SPEC SHEET

Gemma Up&Down 500lm 830 45° 2x6W Dark Grey

Art. no: 2390-45-7



PRODUCT

Ingress Protection:	IP54
Impact Protection:	IK08
Operating Temperature [°C]:	-20 - 50
Length [mm]:	106
Height [mm]:	138
Width [mm]:	80
Weight [kg]:	0,58