




**FDV SPEC SHEET**  
Uniplus Interior  
Art. no: 103052-2-90-3-ddd



## Uniplus Interior

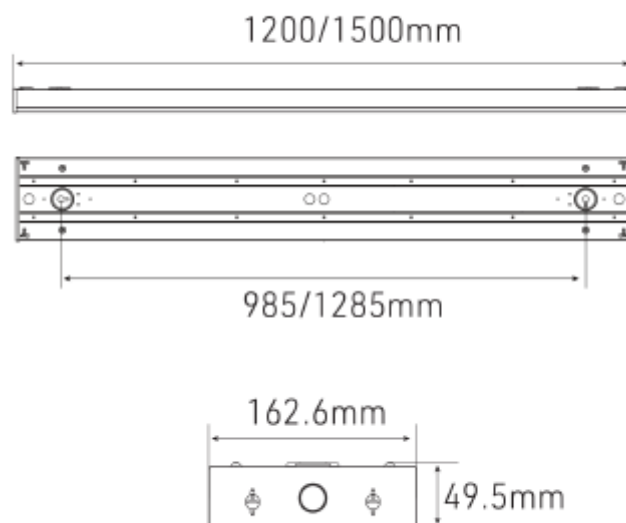

Art. no: 103052-2-90-3-ddd

### LIGHT TECHNICAL

Lightsource Type:	LED (replaceable)
Lumen Output:	5400
Lumen LED (tc=25):	6200
Beam Angle:	90°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.
UGR (<=):	19

### MOUNTING / CONNECTION

Connection:	QuickConnect
Through-wiring (mm2):	5x2,5
Mounting:	Suspended, Ceiling, Surface

### ELECTRICAL DATA

Dimming:	DALI2
Flickerfree:	Yes
System Power [W]:	40
System Voltage [V]:	230V 50Hz
Protection Class:	1
Socket / Cap-Base:	N/A



## FDV SPEC SHEET

Uniplus Interior

Art. no: 103052-2-90-3-ddd



PRODUCT	
Ingress Protection:	IP40
Impact Protection:	IK06
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80: 100 000
Color:	White
RAL:	RAL9003
Length [mm]:	1500
Height [mm]:	49,5
Width [mm]:	162,6
Weight [kg]:	3,4
Housing Material :	Metal