



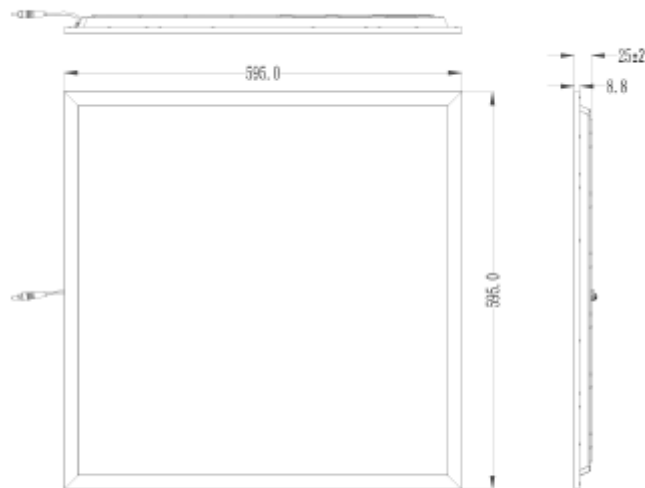

FDV SPEC SHEET

Panel BL

Art. no: 103321-90-2

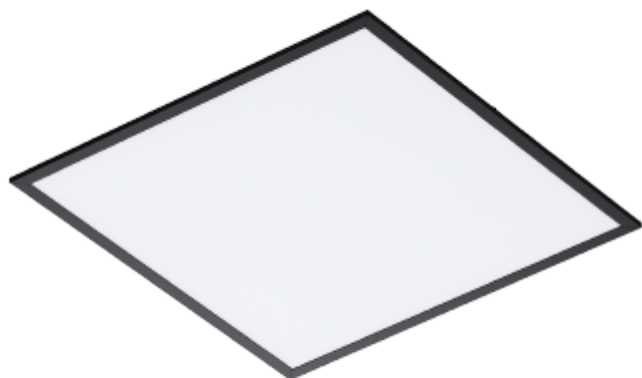

Panel BL



Art. no: 103321-90-2

LIGHT TECHNICAL

| | |
|--------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 4700 |
| Lumen LED (tc=25): | 4900 |
| Beam Angle: | 90° |
| CRI / Ra: | 90 |
| Color Code: | 940 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Micropris. |
| UGR (<=): | 19 |

MOUNTING / CONNECTION

| | |
|---------------|-------------------|
| Connection: | EPN0024 |
| Cut-out [mm]: | 570x570 |
| Mounting: | Recessed, Ceiling |

ELECTRICAL DATA

| | |
|--------------------------|---------------------|
| Dimming: | Depending on Driver |
| Flickerfree: | Yes |
| System Power [W]: | 28 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 2 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 700 |
| Voltage Forward Min [V]: | 30 |
| Voltage Forward Max [V]: | 40 |
| Emergency light [h]: | No Emergency light |
| Emergency light testing: | N/A |



FDV SPEC SHEET

Panel BL

Art. no: 103321-90-2



| PRODUCT | |
|-----------------------------|-----------------|
| Ingress Protection: | IP54 |
| Impact Protection: | IK02 |
| Operating Temperature [°C]: | -10 - 40 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Black |
| Length [mm]: | 595 |
| Height [mm]: | 25 |
| Width [mm]: | 595 |
| Weight [kg]: | 1,6 |
| Housing Material : | Aluminium |
| Diffuser Material: | Polystyrene |