




## FDV SPEC SHEET

Rod Midi T

Art. no: 101820-40-2

# NORLUX®

Lighting Solutions

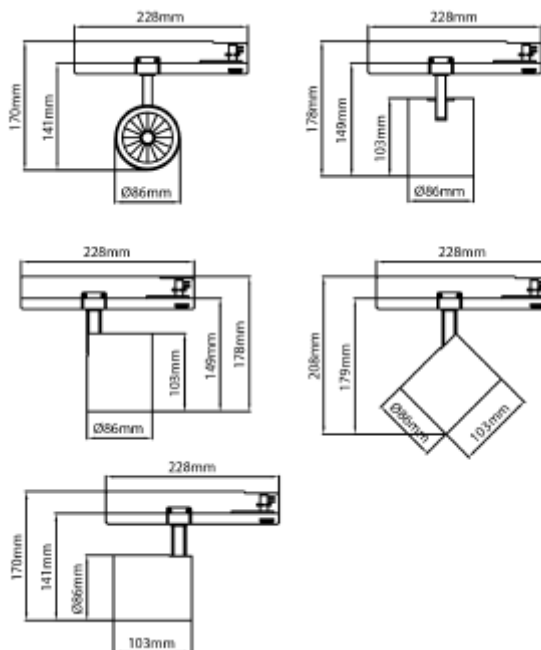

## Rod Midi T



Art. no: 101820-40-2

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	3289
Lumen LED (tc=25):	4100
Beam Angle:	40°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
Lens (Diffuser):	Clear

### MOUNTING / CONNECTION

Connection:	Track 3-Circuit
Mounting:	Track, Ceiling

### ELECTRICAL DATA

Dimming:	None
Flickerfree:	Yes
System Power [W]:	23
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	15
Max load pr circuit - B16:	25
Max load pr circuit - C10:	25
Max load pr circuit - C16:	43
Inrush current I <sub>max</sub> [A]:	42
Inrush current time [μs]:	160
Socket / Cap-Base:	N/A
Current Output [mA]:	600



## FDV SPEC SHEET

Rod Midi T

Art. no: 101820-40-2



PRODUCT	
Ingress Protection:	IP20
Operating Temperature [°C]:	0 - 35
Lifetime [h]:	L80B10: 100 000
Color:	Black
Length [mm]:	162
Height [mm]:	178
Diameter [mm]:	86
Weight [kg]:	0,626
Housing Material :	Aluminium