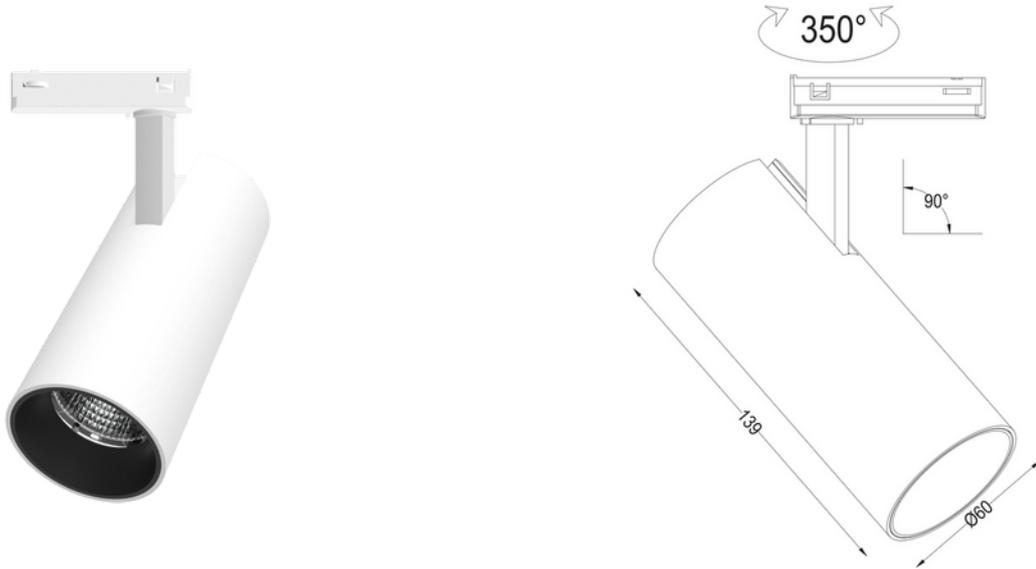


**PRODUCT DATA SHEET**

Cylinder 60 G2 1400lm 930 36° (15°&24°) 15W WH 3-cir DALI

Art.no: 102261-36-3-ddd

*Lighting Solutions*

Cylinder 60 G2 1400lm 930 36° (15°&24°) 15W WH 3-cir DALI



Cylinder 60 G2 is an elegant and modern spotlight, designed to deliver high light output and exceptional color rendering in various environments. With a diameter of 60mm and length of 130mm, this spotlight is both discreet and efficient. Available with beam angles of 15°, 24°, or 36° and color temperatures of 2700K, 3000K, or Dim 2 Warm (3000-1800K). CRI90 ensures excellent color rendering. Equipped with phase-cut dimming. Made of powder-coated aluminum, Cylinder 60 G2 is ideal for use in bedrooms, cafes, cabins, hotels, kitchens, and homes. The built-in driver in the sleek fixture housing provides a clean and modern appearance, while the spotlight can be tilted up to 90° and rotated 350° around its own axis for optimal adjustability. This makes Cylinder 60 perfect for both private and commercial environments.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz
Power (system) (W)	15
Lightsource Max. Power (W) if Socket	na
Emergency light (h)	No Emergency light

**PRODUCT DATA SHEET**

Cylinder 60 G2 1400lm 930 36° (15°&24°) 15W WH 3-cir DALI

Art.no: 102261-36-3-ddd

*Lighting Solutions*

TECHNICAL DATA	
IK (system)	IK02
IP (system)	IP20
IP Front/Back (system)	IP20/20
Product Family	Cylinder 60
Outdoor	No
Operating temperature (°C)	-20 - 45

PHOTOMETRIC DATA	
Lumen Out (system) (lm)	1420
Efficacy (system) (lm/W)	100
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
UGR (<=)	19
Manufacturer (light source)	Bridgelux
Forward Current LED (min-max) (mA)	100 - 540
Forward Voltage LED (max tp=25) (V)	36.2
Driftspenning LED (min tp=65) (V)	32.0

DRIVER	
Manufacturer (driver)	KGP
Protection Class (driver)	2
Standby power P _{sb} (W) <	0.5
Flicker metric (P _{st} LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	40
Dimming (driver)	DALI2
Dimming Minimum Level (%)	1.0
Dimming output type	Amplitude Modulation

**PRODUCT DATA SHEET**

Cylinder 60 G2 1400lm 930 36° (15°&24°) 15W WH 3-cir DALI

Art.no: 102261-36-3-ddd

*Lighting Solutions*

DRIVER	
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Flicker-free	Yes
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	150 - 700
CC (forward voltage driver) (V)	10.0 - 40.0
CV (driver) [V]	36
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B10	17
Max load pr circuit - B16	27
Max load pr circuit - C10	28
Max load pr circuit - C16	44
Max load pr circuit - C20	55
Max load pr circuit - C25	68
Max load pr circuit - C32	72
Leakage current (mA)	0.25
Inrush current time (μ s)	2.8
Inrush current I _{max} (A)	18.0

DIMENSIONS	
Length (product) (mm)	130.0
Height (product) (mm)	130.0
Weight (product) (kg)	0.56
Diameter (product) (mm)	60.0

MATERIALS AND SURFACES	
Color	White
RAL Code	RAL9010
Corrosion Class	C1
Surface treatment	Powdercoated
Housing Material	Aluminium
Diffuser Material	Aluminium



PRODUCT DATA SHEET

Cylinder 60 G2 1400lm 930 36° (15°&24°) 15W WH 3-cir DALI

Art.no: 102261-36-3-ddd



Lighting Solutions

INSTALLATION AND CONNECTION	
Areas of use	Bedroom, Cafe, Cottage, Hotel, Kitchen, Office, Residence, Restaurant, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	E
CE mark	Yes

LIGHT DISTRIBUTION

