


**PRODUCT DATA SHEET**

C Line 12100lm 840 60/52/44/35W Wide 5x2,5mm² Steel 1250mm
 Art.no: 102516-2-01-1

*Lighting Solutions*

C Line 12100lm 840 60/52/44/35W Wide 5x2,5mm² Steel 1250mm

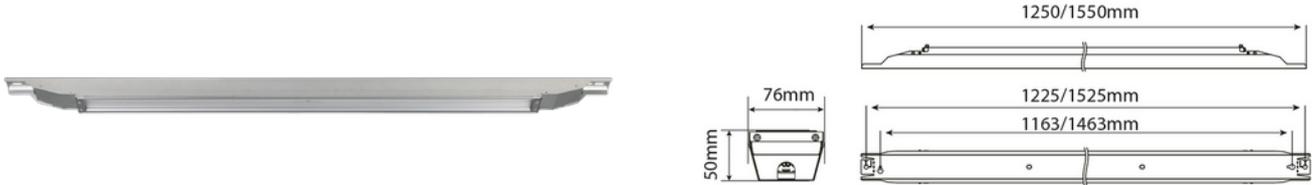

C Line is an industrial lighting fixture designed for ceiling mounting. The fixture has many applications, such as in industrial and warehouse settings. It features through-wiring (5x2.5 mm²), ensuring efficient and tool-free installation.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP23
Outdoor	No
Operating temperature (°C)	-20 - 40

**PRODUCT DATA SHEET**

C Line 12100lm 840 60/52/44/35W Wide 5x2,5mm2 Steel 1250mm

Art.no: 102516-2-01-1

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	180
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (replaceable)
Lens (Diffuser)	Clear
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
Manufacturer (light source)	Shenzhen Jufei Optoelectronics
Forward Current LED (min-max) (mA)	0 - 150

DRIVER	
Manufacturer (driver)	Boke
Flicker-free	Yes

DIMENSIONS	
Length (product) (mm)	1250.0
Width (product) (mm)	76.0
Height (product) (mm)	50.0
Weight (product) (kg)	2.04

MATERIALS AND SURFACES	
Color	Steel

INSTALLATION AND CONNECTION	
Areas of use	Generally, Industrial
Mounting	Surface, Ceiling
Connection (system)	Quickconnectx2

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	B
CE mark	Yes
EPD number	NEPD-11058-11008



PRODUCT DATA SHEET

C Line 12100lm 840 60/52/44/35W Wide 5x2,5mm2 Steel 1250mm

Art.no: 102516-2-01-1



Lighting Solutions

LIGHT DISTRIBUTION

