




FDV SPEC SHEET

Giulio G2 3W 3000K recessed flexible copper/antique brass
Art. no: 102860-13

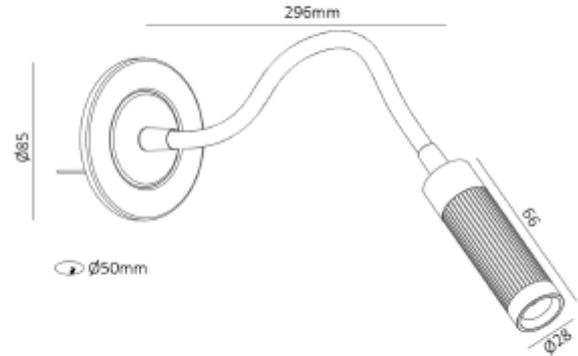

Giulio G2 3W 3000K recessed flexible copper/antique



Art. no: 102860-13

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	153
Lumen LED (tc=25):	160
Beam Angle:	24°
CCT (Color Temperature):	3000
CRI / Ra:	90
Color Code:	930
MacAdam (SDCM):	3
Lens (Diffuser):	Lens
UGR (<=):	10

MOUNTING / CONNECTION

Connection:	Terminal
Cut-out [mm]:	Ø48
Mounting:	Recessed, Wall

ELECTRICAL DATA

Dimming:	Touch dim
Flickerfree:	Yes
Standby power P _{sb} (W) <:	0,1
Flicker metric (P _{st} LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	4
System Voltage [V]:	230V 50Hz
Protection Class:	2
Max load pr circuit - B10:	7
Max load pr circuit - B16:	11
Max load pr circuit - C10:	12
Max load pr circuit - C16:	18
Leakage current [mA]:	0,7
Inrush current I _{max} [A]:	20
Inrush current time [µs]:	250
Socket / Cap-Base:	N/A
Current Output [mA]:	700
Voltage Forward Min [V]:	3



FDV SPEC SHEET

Giulio G2 3W 3000K recessed flexible copper/antique brass
Art. no: 102860-13



PRODUCT	
Ingress Protection:	IP20
Impact Protection:	IK08
Color:	Copper/Brass
Length [mm]:	443
Diameter [mm]:	85
Weight [kg]:	0,4
Housing Material :	Aluminium
Diffuser Material:	PMMA
Material 2:	Steel