





**PRODUCT DATA SHEET**  
 Montana L 3GS120 12m cable  
 Art.no: 103050-120-GS-1



*Lighting Solutions*

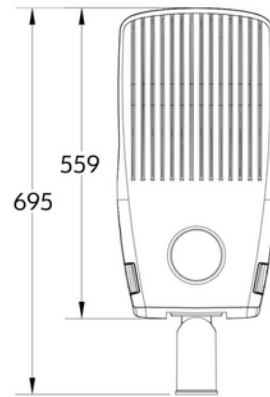

## Montana L 3GS120 12m cable



Montana feature an innovative, tool-free system that allows for easy replacement of the electrical compartment directly on-site. This ensures fast and efficient maintenance while significantly reducing labor costs and downtime. The sleek and aerodynamic design minimizes wind resistance, enhances reliability, and optimizes heat dissipation, resulting in an extended lifespan. Built to withstand challenging conditions such as Nordic roads and high-altitude environments, Montana deliver dependable performance even in extreme settings.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz
Lightsource Max. Power (W) if Socket	54PCS/109.3W@3000K
Emergency light (h)	No Emergency light

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP66

**PRODUCT DATA SHEET**

Montana L 3GS120 12m cable

Art.no: 103050-120-GS-1

*Lighting Solutions*

TECHNICAL DATA	
Outdoor	Yes
Operating temperature (°C)	-40 - 50
Wind force (EPA) (m <sup>2</sup> ) at 0°	0.17

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	140
CRI / Ra (>=)	70
CCT (Color Temperature) (K)	3000
Color Code	730
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	PMMA
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	5
Manufacturer (light source)	Osram
Forward Current LED (min-max) (mA)	10 - 200
Forward Voltage LED (max tp=25) (V)	22.2
Driftspenning LED (min tp=65) (V)	21.7

DRIVER	
Manufacturer (driver)	Inventronics
Protection Class (driver)	1 or 2
Standby power P <sub>sb</sub> (W) <	0.5
Flicker metric (P <sub>st</sub> LM) <	0.02
Stroboscopic effect metric (SVM) <	0.029
Max Output Voltage (V)	300
Dimming (driver)	DALI2, D4i
Dimming Minimum Level (%)	10.0
IP (driver)	IP20
Expected Lifetime (driver) (h)	120000
Flicker-free	Yes
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	45 - 700
CC (forward voltage driver) (V)	86.0 - 266.0
Surge Protection	L-N = 6KV

**PRODUCT DATA SHEET**

Montana L 3GS120 12m cable

Art.no: 103050-120-GS-1

*Lighting Solutions*

<b>DRIVER</b>	
Output Current Tolerance (%)	5.0
Current Ripple (%)	10.0
Max load pr circuit - B10	5
Max load pr circuit - B16	8
Max load pr circuit - C10	9
Max load pr circuit - C16	14
Max load pr circuit - C20	18
Max load pr circuit - C25	22
Max load pr circuit - C32	28
Leakage current (mA)	0.7
Inrush current time (µs)	172.0
Inrush current I <sub>max</sub> (A)	93.0

<b>DIMENSIONS</b>	
Length (product) (mm)	695.0
Width (product) (mm)	285.0
Height (product) (mm)	140.0
Weight (product) (kg)	8.8
Diameter (product) (mm)	76.0

<b>MATERIALS AND SURFACES</b>	
Color	Grey
RAL Code	Pantone8403C
Corrosion Class	C4
Surface treatment	Powdercoated
Housing Material	Aluminium
Housing Material %	48.0
Diffuser Material	PMMA
Diffuser Material%	0.5700000000000001
Recycled Aluminium %	72.0
Material 2%	5.800000000000001
Material 3%	2.15
Material 4%	9.8
Material 5%	17.5
Material 6%	1.3599999999999999



**PRODUCT DATA SHEET**  
Montana L 3GS120 12m cable  
Art.no: 103050-120-GS-1



*Lighting Solutions*

MATERIALS AND SURFACES	
Material 7%	0.51

INSTALLATION AND CONNECTION	
Areas of use	Outdoor, Parking, Street
Mounting	Mast
Connection (system)	Cable 12m

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	D
CE mark	Yes
EPD number	NEPD-14084-14417