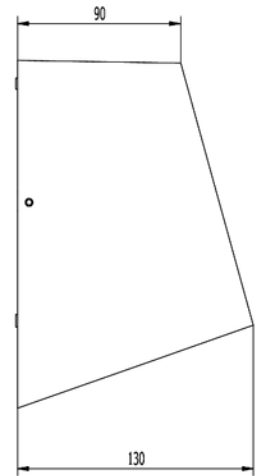
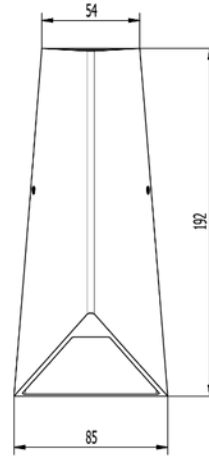


**PRODUCT DATA SHEET**

Yed Up&amp;Down 480lm 830 90° 2x4W Dark Grey Quickconnect

Art.no: 2455-90-7

*Lighting Solutions*

## Yed Up&Down 480lm 830 90° 2x4W Dark Grey Quickconnect



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP54
Outdoor	Yes
Operating temperature (°C)	-20 - 50

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	51
CRI / Ra (>=)	80

**PRODUCT DATA SHEET**

Yed Up&amp;Down 480lm 830 90° 2x4W Dark Grey Quickconnect

Art.no: 2455-90-7

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	3000
Color Code	830
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Forward Voltage LED (max tp=25) (V)	20.0
Driftspenning LED (min tp=65) (V)	18.0

DRIVER	
Protection Class (driver)	2
Output Current Tolerance (%)	5.0
Current Ripple (%)	70.0
Leakage current (mA)	0.5
Inrush current I <sub>max</sub> (A)	10.0

DIMENSIONS	
Length (product) (mm)	130.0
Width (product) (mm)	85.0
Height (product) (mm)	192.0
Weight (product) (kg)	0.67

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Facade, Outdoor, Residence
Mounting	Surface, Wall
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A



**PRODUCT DATA SHEET**

Yed Up&Down 480lm 830 90° 2x4W Dark Grey Quickconnect

Art.no: 2455-90-7



*Lighting Solutions*

**LIGHT DISTRIBUTION**

