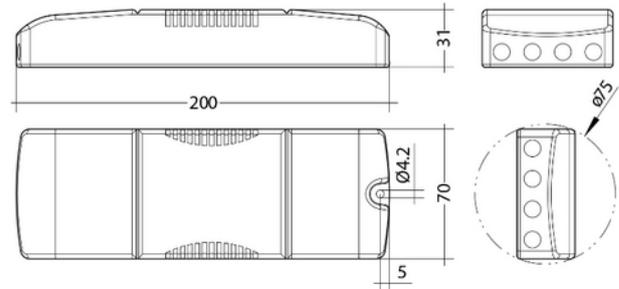


**PRODUCT DATA SHEET**

Driver 250-700mA cc (15-24/50V) LCA 17W one4All SR PRE DALI

Art.no: 28000670

*Lighting Solutions*

Driver 250-700mA cc (15-24/50V) LCA 17W one4All SR PRE DALI

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Dimming (driver)	CLO, Corridor, DALI2, Push, Ready2Mains
Dimming Minimum Level (%)	1.0
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	250 - 700
Current setting (driver)	DALI-2, I-Select 2 Plug (Tridonic), Ready2Mains
CC (forward voltage driver) (V)	15.0 - 50.0
Output Current Tolerance (%)	3.0
Current Ripple (%)	5.0
Max load pr circuit - B10	22

**PRODUCT DATA SHEET**

Driver 250-700mA cc (15-24/50V) LCA 17W one4All SR PRE DALI
Art.no: 28000670



Lighting Solutions

DRIVER	
Max load pr circuit - B16	36
Max load pr circuit - C10	36
Max load pr circuit - C16	60
Leakage current (mA)	0.7
Inrush current time (μ s)	140.0
Inrush current I _{max} (A)	18.0

DIMENSIONS	
Length (product) (mm)	200.0
Width (product) (mm)	70.0
Height (product) (mm)	31.0
Weight (product) (kg)	0.2