


**PRODUCT DATA SHEET**

Cylinder 60 1100lm D2W 2-3000K 38° 15W BK 1-circuit Phasecut
 Art.no: 601DC-02-38-2

*Lighting Solutions*

Cylinder 60 1100lm D2W 2-3000K 38° 15W BK 1-circuit Phasecut

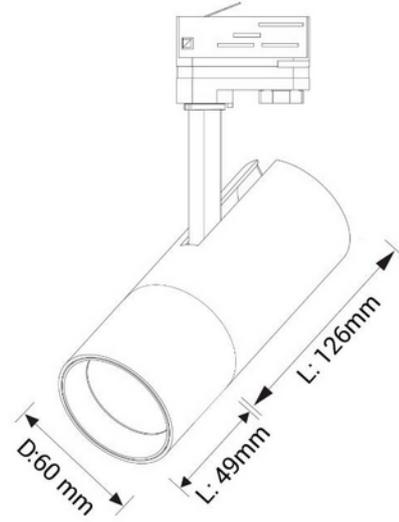

The Cylinder 60 has the LED driver included in the lamp head and is available for use in 1-circuit – and 3-circuit tracks, both models are available with a Dim to Warm option. It can be tilted 90 degrees and rotated 350 degrees on its own axis and comes with a variety of accessories.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

**PRODUCT DATA SHEET**

Cylinder 60 1100lm D2W 2-3000K 38° 15W BK 1-circuit Phasecut

Art.no: 601DC-02-38-2

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	95
CCT (Color Temperature) (K)	3000-2000K D2W
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
Manufacturer (light source)	Tridonic

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Max Output Voltage (V)	55
Dimming Minimum Level (%)	5.0
Dimming Phasecut Type	Leading / Trailing edge
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	60000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	21.0 - 42.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	30.0
Max load pr circuit - B10	50
Max load pr circuit - B16	80
Max load pr circuit - C10	50
Max load pr circuit - C16	80
Inrush current time (µs)	40.0

DIMENSIONS	
Width (product) (mm)	60.0
Height (product) (mm)	220.0
Weight (product) (kg)	0.6

**PRODUCT DATA SHEET**

Cylinder 60 1100lm D2W 2-3000K 38° 15W BK 1-circuit Phasecut
Art.no: 601DC-02-38-2



Lighting Solutions

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Cottage, Hotel, Kitchen, Office, Residence, Restaurant, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 1-Circuit

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A