


**PRODUCT DATA SHEET**

LED Strip COB 24V 940 1150lm/m 11W/m IP65 2m cable L=5m
Art.no: DL-103031-24-4000-5



Lighting Solutions

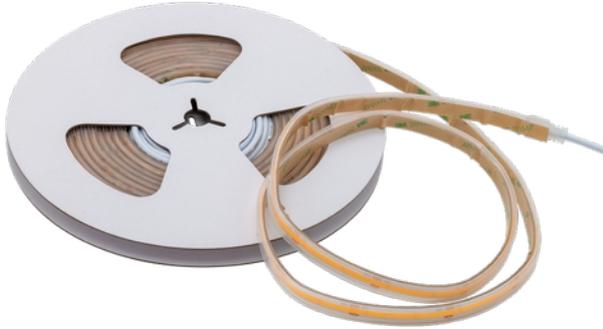

LED Strip COB 24V 940 1150lm/m 11W/m IP65 2m cable L=5m



The Led Strip COB High Efficiency provides perfectly even and pleasant light without visible dots or spots, creating an atmosphere that is both inviting and functional. The LED strip boasts high lumens per watt, allowing for flexible installation so you can customize the lighting according to your needs and preferences. With 3-step MacAdam color consistency, you can be confident that our light remains stable and uniform over time. Choose between 2700K, 3000K, or 4000K. This LED strip has a beam angle of 120° and CRI 90, rendering colors in a natural and accurate manner. Choose between IP20 or IP65 variants for both indoor and outdoor use

ELECTRICAL DATA	
Protection Class (system)	3
Dimming (system)	Depending on Driver
Voltage (system) [V]	24VDC
Power pr. meter (W/m)	10.0
Max. power (W)	11.0

**PRODUCT DATA SHEET**

LED Strip COB 24V 940 1150lm/m 11W/m IP65 2m cable L=5m

Art.no: DL-103031-24-4000-5

*Lighting Solutions*

TECHNICAL DATA	
IP (system)	IP65
Outdoor	Yes
Operating temperature (°C)	-20 - 45
Heat sink needed	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	112
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	4000
Color Code	940
Lifetime (h)	L80B10: 50.000
MacAdam (SDCM)	3
LED/m	576
Lumen pr. meter (lm/m)	1120

DRIVER	
Constant current or voltage (CC or CV)	CV

DIMENSIONS	
Length (product) (mm)	5020.0
Width (product) (mm)	12.0
Weight (product) (kg)	0.2833
Max. length (m)	5
Max Width LED Strip (mm)	12.0

INSTALLATION AND CONNECTION	
Connection LED Strip	Cable 2m

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	F
CE mark	Yes
EPD number	NEPD-14535-15052