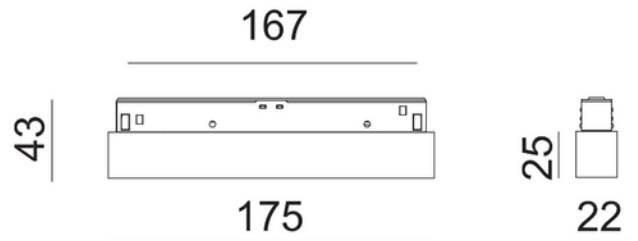


**PRODUCT DATA SHEET**

Flare CM5 927 750lm 34° 10W Evo BK DALI

Art.no: 101485-34-2-ddd

*Lighting Solutions*

Flare CM5 927 750lm 34° 10W Evo BK DALI



Flare CM5 is a variant that fits our Evo 48W Track system. With its 5 diodes, 10W and high lumen output this is a perfect fit for cabins, hotels, housing and restaurants.

ELECTRICAL DATA	
Protection Class (system)	3
Dimming (system)	DALI
Voltage (system) [V]	48VDC

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	65
CRI / Ra (>=)	90

**PRODUCT DATA SHEET**

Flare CM5 927 750lm 34° 10W Evo BK DALI

Art.no: 101485-34-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	2700
Color Code	927
Socket / Cap-Base	N/A
Manufacturer (light source)	Osram

DRIVER	
Manufacturer (driver)	HEP
Standby power Psb (W) <	0.5
Max Output Voltage (V)	48
Dimming Minimum Level (%)	5.0
Dimming output type	Amplitude Modulation
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - 700
CC (forward voltage driver) (V)	6.0 - 40.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0

DIMENSIONS	
Length (product) (mm)	175.0
Width (product) (mm)	22.0
Height (product) (mm)	43.0

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Hotel, Residence, Restaurant
Mounting	Track
Connection (system)	Track EVO 48V

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A



PRODUCT DATA SHEET

Flare CM5 927 750lm 34° 10W Evo BK DALI

Art.no: 101485-34-2-ddd



Lighting Solutions

LIGHT DISTRIBUTION

