



PRODUCT DATA SHEET

Hypnos 600lm 827 6W 36° Ø64mm WH phasecut

Art.no: 103070-36-3




Lighting Solutions



55

Cut out Ø64

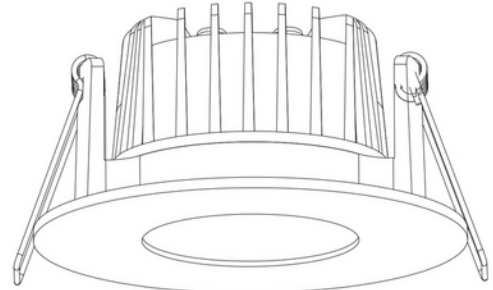

Ø68

Hypnos 600lm 827 6W 36° Ø64mm WH phasecut



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz
Emergency light (h)	No Emergency light

TECHNICAL DATA	
IK (system)	IK02
IP (system)	IP44
IP Front/Back (system)	IP40/20
Outdoor	No
Operating temperature (°C)	-20 - 45

**PRODUCT DATA SHEET**

Hypnos 600lm 827 6W 36° Ø64mm WH phasecut

Art.no: 103070-36-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	100
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	2700
Color Code	927
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
UGR (<=)	23
Manufacturer (light source)	Sunpu
Forward Current LED (min-max) (mA)	200 - 450
Forward Voltage LED (max tp=25) (V)	17.5
Driftspenning LED (min tp=65) (V)	12.0

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Standby power P _{sb} (W) <	0.5
Flicker metric (P _{st} LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	26
Dimming (driver)	Phase-Cut
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Flicker-free	Yes
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	332 - 367
CC (forward voltage driver) (V)	13.0 - 26.0
CV (driver) [V]	15
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B16	182

**PRODUCT DATA SHEET**

Hypnos 600lm 827 6W 36° Ø64mm WH phasecut

Art.no: 103070-36-3

*Lighting Solutions*

DRIVER	
Max load pr circuit - C10	280
Max load pr circuit - C16	448
Max load pr circuit - C20	560
Max load pr circuit - C25	700
Max load pr circuit - C32	800
Leakage current (mA)	5.0
Inrush current time (µs)	100.0
Inrush current I _{max} (A)	5.0

DIMENSIONS	
Height (product) (mm)	55.0
Weight (product) (kg)	0.255555555555556
Diameter (product) (mm)	68.0

MATERIALS AND SURFACES	
Color	White
RAL Code	RAL9010
Corrosion Class	C1
Housing Material	Aluminium
Diffuser Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Generally, Residence
Mounting	Recessed
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	F
CE mark	Yes